



1. Unplug cable of battery charger, then plug red battery cut-off plug into the machine



2. Fill solution tank with clean water  
Or: use the J-Flex system to fill the tank with cleaning solution.



3. Dose cleaning product into dosing aid and pour into the grey fresh water tank.



4. Mount squeegee: position pockets of the squeegee exactly under the squeegee holder and push holder down



5. Position tool(s) carefully under lifted brush unit




6. Switch on machine with the button on the display – press button for 3 seconds



7. Lower brush unit with the foot pedal. Briefly pull the operating lever for brush drive to allow coupling of tool



8. Lower squeegee by pushing down the foot pedal

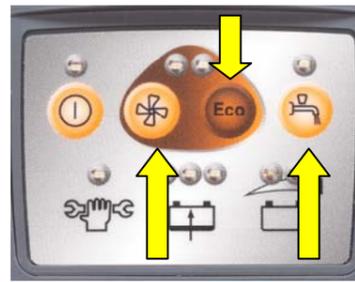

9. Start vacuum motor and solution supply (press orange buttons)  
"ECO" button: lowers the suction motor for use in noise sensitive area.



10. Adjust solution flow with the light blue lever on the left side of the machine



11. Clean the floor. After that switch off the machine with the key switch.



12. Drain recovery tank with the draining hose, then drain the solution tank with the hose on the back-side of the machine



13. Rinse the recovery tank with fresh water. To do so it can be removed from the machine



14. Clean the floater and the yellow dirt sieve



15. Clean solution filter



16. Lift brush unit and remove tool by turning anti-clockwise, clean tools and allow to air dry



17. Remove and clean squeegee



18. Wipe machine with moist cloth



19. Flip the yellow dirt sieve and store the machine with partially open lid for ventilation (lid rests on the yellow dirt sieve)



20. Unplug the red battery cut-off plug, then plug in the cable of the battery charger



**ATTENTION!** Do not use the machine before you have read and understood the Instructions of use